



METAL STAINLESS STEEL

MATERIAL
INOXIDABLE:
PLETINAS


Peso aproximado por metro de pletina, en acero inoxidable.

Espesor (mm)	ANCHO EN (mm)													
	15	20	25	30	35	40	45	50	55	60	70	80	100	120
3	0,35	0,47	0,59	0,71	0,83	0,94	1,06	1,18	1,30	1,42	1,70	1,89	2,36	2,85
4	0,47	0,63	0,79	0,94	1,10	1,26	1,42	1,57	1,73	1,89	2,20	2,52	3,15	3,80
5	0,59	0,79	0,98	1,18	1,38	1,57	1,77	1,97	2,16	2,36	2,80	3,15	3,94	4,75
6	0,71	0,94	1,18	1,41	1,65	1,89	2,22	2,36	2,60	2,83	3,30	3,78	4,72	5,70
8	0,94	1,26	1,57	1,88	2,20	2,52	2,83	3,15	3,46	3,78	4,40	5,04	6,30	7,54
10	1,18	1,57	1,96	2,36	2,76	3,15	3,54	3,94	4,33	4,72	5,30	6,30	7,87	9,42
12	1,41	1,88	2,36	2,83	3,31	3,78	4,25	4,72	5,19	5,67	6,60	7,56	9,44	11,30
15	1,77	2,36	2,94	3,53	4,13	4,72	5,31	5,90	6,49	7,08	8,30	9,44	11,80	14,10
20	2,36	3,14	3,93	4,71	5,51	6,30	7,08	7,87	8,66	9,44	11,0	12,59	15,74	18,80
25	2,94	3,93	4,91	5,89	6,89	7,87	8,86	9,84	10,82	11,81	13,80	15,74	19,67	23,60
30	3,53	4,71	5,89	7,07	8,26	9,44	10,63	11,81	12,88	14,17	16,50	18,88	23,61	28,30
35	4,12	5,50	6,87	8,24	9,64	11,02	12,39	13,77	15,15	16,53	19,30	22,03	27,54	33,00
40	4,71	6,28	7,85	9,42	11,02	12,59	14,18	15,74	17,31	18,87	22,00	25,18	31,48	37,30

Las pletinas de Acero Inoxidable pueden ser cizalladas o laminadas y los acabados pueden ser:

- Mate
- Pulida
- Esmerilada
- Satinada.

Acabado Mate :

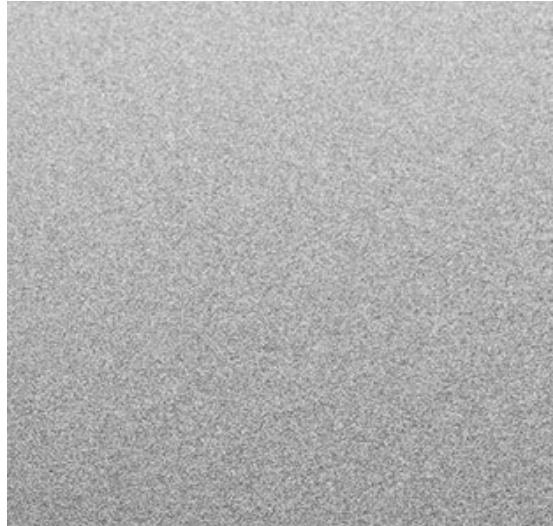

Acabado Pulido:



Acabado Esmerilado:



Acabado Satinado:

